


# Product data sheet

Status: 04.09.2023 | 12:31

Item no. 1750

## Beschichtungsseite

coated side | côté du revêtement

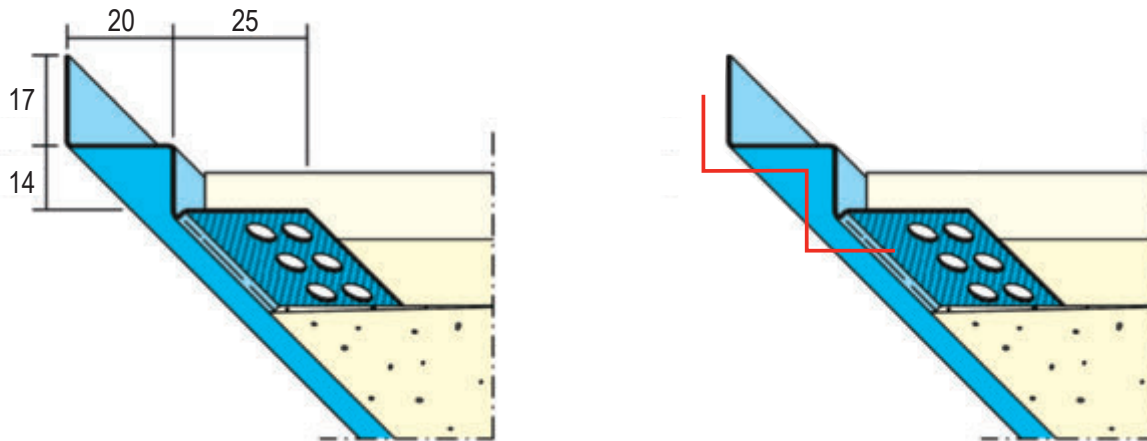

<b>Designation</b>	Connecting profile for dry lining 12,5 mm PB
<b>Description</b>	Galvanised steel render stop with 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.
<b>Product area</b>	Internal construction
<b>Product category</b>	Design profiles
<b>Plaster thickness</b>	1,0 mm
<b>Material</b>	Galvanised steel
<b>GK/Plate</b>	12,5 mm
<b>Standard EN</b>	EN 14353
<b>Product length</b>	300,0 cm
<b>Reaction to fire (R2F)</b>	A1
<b>Packaging Unit</b>	20 STB / 72 BUN
<b>Leaflet</b>	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, <a href="http://www.europrofiles.com">www.europrofiles.com</a> * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., <a href="http://www.gips.de">www.gips.de</a>
<b>shadow gap</b>	20 mm

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!