



PLACO® PPM 15 1200 Boards



Product Description

Laminated Gypsum Plasterboard with cardboard on both sides, with a thickness of 15 mm and a width of 1200 mm, conveniently additivated to reduce surface absorption of water (H1 according to EN 520).

Application


Construction of interior drywall systems: wall partitions and self-supporting cladding and continuous ceilings. It will be used mainly in rooms with average humidity such as kitchens and bathrooms.

Storage and conservation

Store the boards on flat surfaces and never outdoors, keeping them covered, away from sunlight and rain. Maximum stacking of the boards: 6 pallets.

Conditions of installation

Consult Placo® Installation Manual.

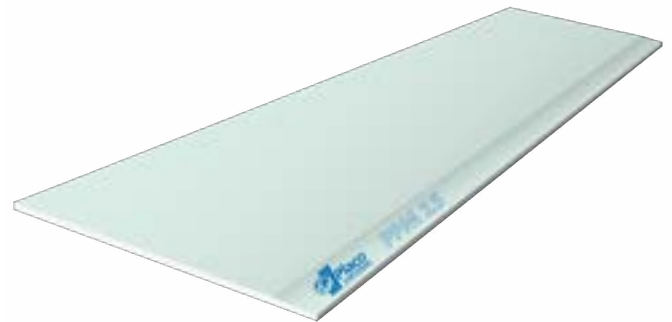

Handling

During the unloading, the aperture of the forks of the forklift should be a minimum of 1/3 of the length of the board being handled, always placing the load in the centre of the forks on the forklift. Special care is advised for handling 3,000 mm boards.

| Characteristic | Value |
|---------------------------------------|--|
| Norms | EN 520, Gypsum plasterboards. Definitions, requirements and test methods |
| Board thickness | 15 mm |
| Board Thickness Tolerance | ± 0.5 mm |
| Board liner color | Green |
| Board reverse color | Grey |
| Long Edge Type | Tapered Edge (TE) |
| Short Edge Type | Square Edge (SE) |
| Thermal conductivity | 0.25 W/m.K |
| Water vapour diffusion factor μ | 10 |
| Fire Reaction (EN Standard) | A2-s1, d0 |
| CE board type designation | H1 |
| Total water absorption | ≤ 5% |
| Surface water absorption | < 180 g/m ² |
| Approximate weight per m ² | 10.5 kg/m ² |
| Flexural breaking load longitudinal | ≥ 650 N |
| Flexural breaking load transversal | ≥ 250 N |

| Length (mm) | Width (mm) | Packaging Boards/Pallet |
|-------------------|-------------------|-------------------------|
| 2500 ¹ | 1200 ² | 30 |
| 2600 ¹ | 1200 ² | 30 |
| 2700 ¹ | 1200 ² | 30 |
| 3000 ¹ | 1200 ² | 30 |

¹ Tolerance of length (mm): +0/-5

² Tolerance of width (mm): +0/-4

