


# Product data sheet

Status: 15.05.2019 | 15:05

Item no.9299

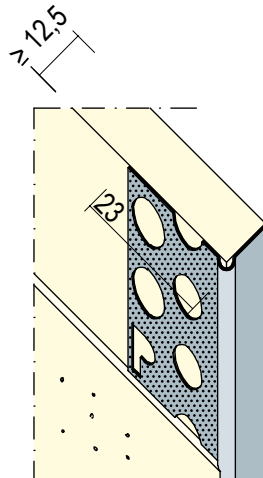

<b>Designation</b>	Stop profile for dry lining 12,5 mm PB
<b>Description</b>	“Göppinger” profile made of aluminium for creating single edges at plastered junctions, e.g. sliding ceiling and wall connections, for plasterboard sheets of 12.5 mm and thicker.
<b>Line of Business</b>	Plaster
<b>Productclass</b>	Accessory profiles for drylining purposes
<b>Productgroup</b>	Corner beads
<b>Plaster thickness</b>	1,0 mm
<b>Material</b>	Aluminum natural
<b>Material thickness</b>	0,4 mm
<b>Standard EN</b>	EN 14353
<b>Product length</b>	300 cm, 250 cm
<b>Reaction to fire (R2F)</b>	A1
<b>Packaging Unit</b>	50 STB / 200 BUN

## Commentaires / characteristics

With a 3D surface structure for increased profile stability and improved plaster embedding.

Material thicknesses:

- 9299: 0.40 mm

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!