


Product data sheet

Status: 03.09.2019 | 15:49

Item no. 1750

Beschichtungsseite

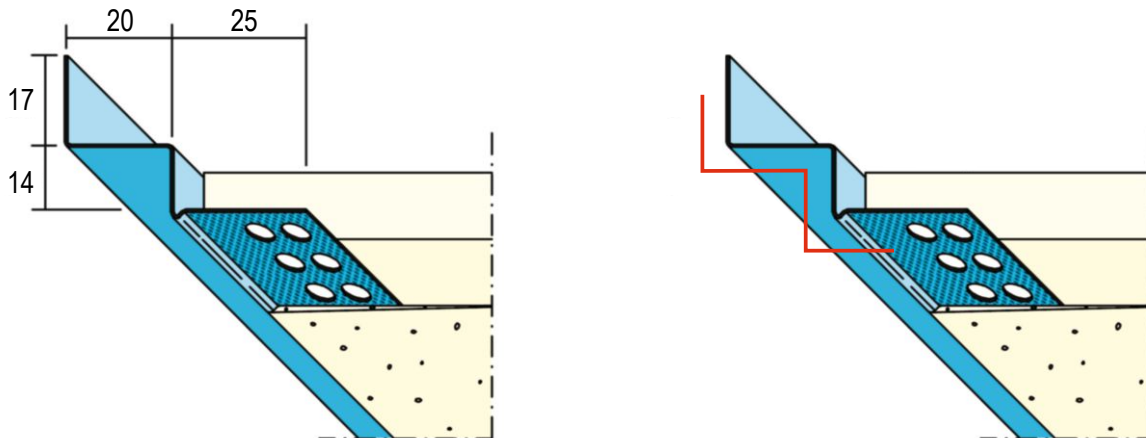

Designation	Connecting profile for dry lining 12,5 mm PB, SG
Description	Galvanised steel render stop with 20-mm shadow joint. For creating plastered single edges at plastered junctions, e.g. sliding ceiling and wall connections, for 12.5-mm plasterboard panels.
Line of Business	Plaster
Productclass	Accessory profiles for drylining purposes
Productgroup	Render stops / Architave beads
Plaster thickness	1,0 mm
Material	Galvanised steel
GK/Plate	12,5 mm
Standard EN	EN 14353
Product length	300,0 cm
Reaction to fire (R2F)	A1
Packaging Unit	20 BAR / 135 BUN
	Please observe the following data sheets: *Data sheet Planning and Application of Metallic Plaster Profiles; published by: The European Association of Bead and Lath Producers, www.europoprofiles.com *Data sheet Plaster and Dry Construction in Damp Environments; published by: Zentralverband des Deutschen Baugewerbes, www.zdb.de *Data sheet Winter Construction Sites; published by: Bundesverband der Gipsindustrie e.V., www.gips.de .